

Schäfer + Peters GmbH
Competence in Stainless Steel



TBS-DRILL, CYL. HEAD TERRACE SCREWS
ITEM 9243 A4 TX



ITEM 9243 A4 TX TBS-DRILL, CYL. HEAD TERRACE SCREWS

USES:

Ideal for all companies involved in wood processing (carpenters, timber construction) and all horticulturists and landscapers for fastening timbers and landing stages. Also the ideal solution for hardwoods such as Bankirai, Massaranduba, and many more.

A minimum screw-in depth of 4 x the diameter must be ensured. A screw-in depth of 8 x the diameter should be achieved depending on the wood.

FEATURES:

- Cylinder head
- Under head thread
- Standard tip
- TX driving feature
- Special smooth coating

BENEFITS:

No predrilling. Predrilling is not needed in most cases. We do however always recommend testing the application.

Wobble-free driving feature

The TX inner multi-tooth drive allows the screw to be easily and securely screwed in when the screw is attached and countersunk.


Cylinder head no distant wooden fibers.

The wooden fibers are drawn into the material by the cylinder head with the implied countersunk head. An optimal barefooted flooring originates by this special process.


Under head thread

This terrace screws fix the wood through the lower head screw, thereby preventing movement.

| d d | l l | b b | dk dk | k k | b1 b1 | dz dz | Antrieb Drive size | Artikelnummer Item Number | |
|--------|--------|--------|----------|--------|----------|----------|-----------------------|------------------------------|-----|
| 5,5 | 40 | 18 | 8 | 5,1 | 8 | 6,15 | TX25 | 9243455 40 | 100 |
| | 50 | 18 | 8 | 5,1 | 8 | 6,15 | TX25 | 9243455 50 | 100 |
| | 60 | 24 | 8 | 5,1 | 8 | 6,15 | TX25 | 9243455 60 | 100 |
| | 70 | 34 | 8 | 5,1 | 8 | 6,15 | TX25 | 9243455 70 | 100 |
| | 80 | 36 | 8 | 5,1 | 8 | 6,15 | TX25 | 9243455 80 | 100 |
| | 90 | 36 | 8 | 5,1 | 8 | 6,15 | TX25 | 9243455 90 | 100 |
| 100 | 36 | 8 | 5,1 | 8 | 6,15 | TX25 | 9243455 100 | 100 | |

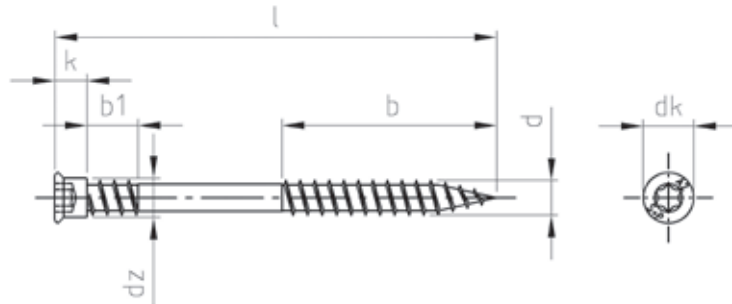

BENEFITS

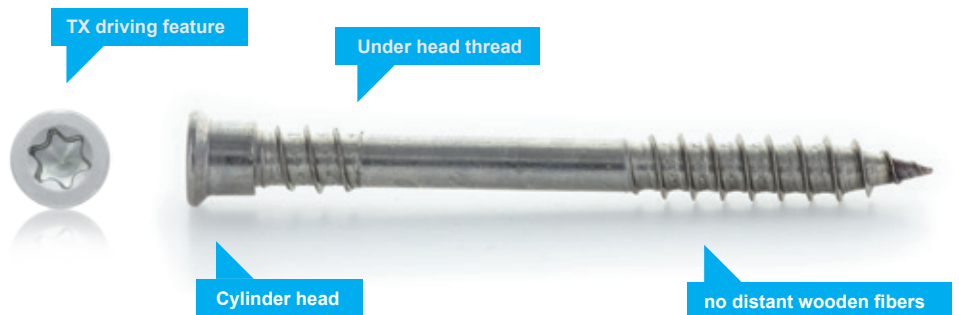

Schäfer + Peters GmbH
Zeilbaumweg 32
DE-74613 Öhringen

Tel. +49 (0) 7941 6094-0
Fax +49 (0) 7941 6094-700

info@schaefer-peters.com
www.schaefer-peters.com